


### Typical Applications

- Furnace, kiln, reformer and boiler linings
- Investment casting mold wrappings
- Removable insulating blankets for field stress relieving welds
- Reusable insulation for steam and gas turbines
- Flexible high temperature pipe insulation
- Pressure and cryogenic vessel fire protection
- High temperature kiln and furnace insulation
- Furnace door linings and seals
- Soaking pit seals
- Furnace repairs
- Thermal reactor insulation
- Expansion joint seals
- Primary reformer header insulation
- High temperature gasketing
- Glass furnace crown insulation
- Incineration equipment and stack linings
- Annealing cover seals
- High temperature filtration
- Nuclear insulation applications
- Replacement for asbestos blanket

### Durablanket

#### Thermal Conductivity vs Mean Temperature (per ASTM C-177)\*\*

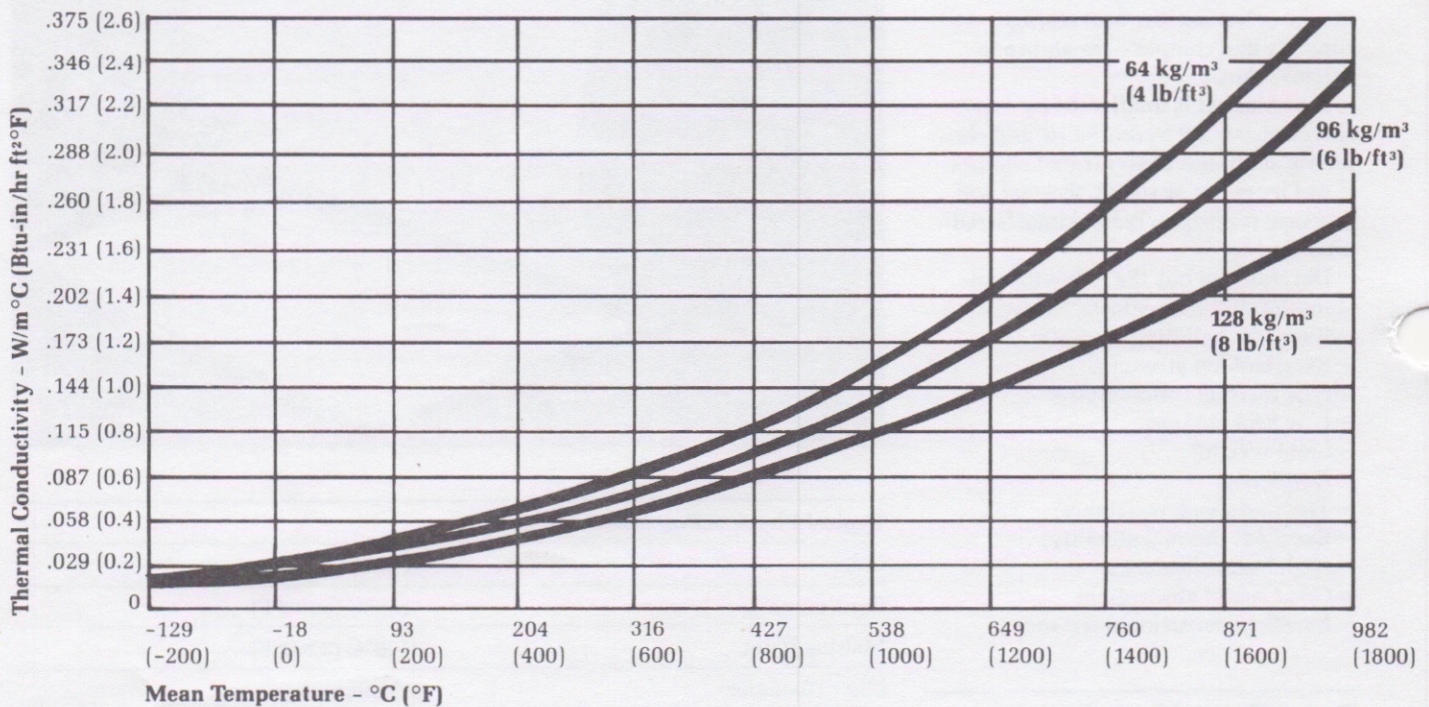

\*\*All heat flow calculations are based on a surface emissivity factor of .90, an ambient temperature of 27°C (80°F), and zero wind velocity, unless otherwise stated. All thermal conductivity values for Fiberfrax materials have been measured in accordance with ASTM Test Procedure C-177. When comparing similar data, it is advisable to check the validity of all thermal conductivity values and ensure the resulting heat flow calculations are based on the same condition factors. Variations in any of these factors will result in significant differences in the calculated data.

**Distributed by Thermal Products Company, Inc.**





Durablanket - 64 kg/m<sup>3</sup> (4 lb/ft<sup>3</sup>)\*\*

Hot Face °C (°F)	Insulation Thickness - mm (in) Cold Face Temperature - °C (°F)						
	6.4 (1/4)	13 (1/2)	25 (1)	38 (1 1/2)	51 (2)	76 (3)	102 (4)
649 (1200)	311 (591)	232 (449)	164 (328)	133 (271)	113 (236)	91 (196)	78 (173)
760 (1400)	367 (693)	277 (531)	199 (390)	161 (321)	138 (280)	110 (230)	94 (201)
871 (1600)	424 (795)	323 (614)	234 (454)	191 (375)	163 (326)	131 (268)	112 (233)
982 (1800)	480 (896)	369 (697)	271 (520)	222 (432)	191 (376)	153 (308)	131 (267)
1093 (2000)	536 (996)	416 (780)	308 (587)	254 (489)	219 (427)	177 (350)	151 (303)
1204 (2200)	590 (1094)	461 (862)	346 (655)	287 (548)	248 (479)	201 (394)	172 (342)
1260 (2300)	617 (1142)	484 (903)	364 (688)	303 (577)	263 (506)	214 (417)	183 (362)

Durablanket - 96 kg/m<sup>3</sup> (6 lb/ft<sup>3</sup>)\*\*

Hot Face °C (°F)	Insulation Thickness - mm (in) Cold Face Temperature - °C (°F)						
	6.4 (1/4)	13 (1/2)	25 (1)	38 (1 1/2)	51 (2)	76 (3)	102 (4)
649 (1200)	287 (548)	210 (410)	147 (297)	118 (245)	102 (215)	82 (179)	71 (159)
760 (1400)	341 (646)	253 (488)	179 (355)	144 (292)	123 (254)	99 (210)	84 (184)
871 (1600)	397 (746)	298 (568)	213 (416)	173 (343)	147 (297)	118 (244)	101 (213)
982 (1800)	452 (845)	343 (649)	249 (480)	202 (396)	173 (344)	138 (281)	118 (244)
1093 (2000)	506 (943)	388 (731)	285 (545)	233 (451)	201 (393)	161 (321)	137 (278)
1204 (2200)	560 (1040)	433 (812)	322 (611)	264 (508)	228 (443)	184 (363)	157 (315)
1260 (2300)	587 (1088)	456 (852)	340 (644)	281 (537)	243 (469)	196 (385)	168 (334)

Durablanket - 128 kg/m<sup>3</sup> (8 lb/ft<sup>3</sup>)\*\*

Hot Face °C (°F)	Insulation Thickness - mm (in) Cold Face Temperature - °C (°F)						
	6.4 (1/4)	13 (1/2)	25 (1)	38 (1 1/2)	51 (2)	76 (3)	102 (4)
649 (1200)	261 (501)	187 (369)	129 (265)	103 (218)	88 (191)	72 (161)	62 (144)
760 (1400)	311 (591)	226 (439)	158 (316)	126 (259)	107 (225)	86 (187)	74 (165)
871 (1600)	360 (680)	266 (510)	187 (369)	150 (302)	128 (262)	102 (216)	87 (189)
982 (1800)	408 (767)	305 (581)	217 (423)	175 (347)	149 (301)	119 (246)	101 (214)
1093 (2000)	456 (852)	344 (651)	248 (478)	201 (394)	172 (341)	137 (279)	117 (242)
1204 (2200)	502 (936)	382 (720)	279 (534)	227 (441)	195 (383)	156 (312)	132 (270)
1260 (2300)	525 (977)	401 (754)	294 (561)	240 (464)	207 (404)	166 (330)	141 (285)

\*\*All heat flow calculations are based on a surface emissivity factor of .90, an ambient temperature of 27°C (80°F), and zero wind velocity, unless otherwise stated. All thermal conductivity values for Fiberfrax materials have been measured in accordance with ASTM Test Procedure C-177. When comparing similar data, it is advisable to check the validity of all thermal conductivity values and ensure the resulting heat flow calculations are based on the same condition factors. Variations in any of these factors will result in significant differences in the calculated data.



Thermal Products Company, Inc.  
4520 S. Berkeley Lake Rd.  
Norcross, GA 30071-1639

Phone: 770-662-0456  
Fax: 770-242-6210  
www.thermalproductsco.com  
info@thermalproductsco.com