

Specifications

Nomenclature	970-A	972-AH	970-F	972-FH	970-J	972-JH
Rated Thickness*	.508 mm (.020")	.508 mm (.020")	1.02 mm (.040")	1.02 mm (.040")	2.03 mm (.080")	2.03 mm (.080")
Nom. Thickness, Uncompressed	.80 mm (1/32")	.80 mm (1/32")	1.60 mm (1/16")	1.60 mm (1/16")	3.20 mm (1/8")	3.20 mm (1/8")

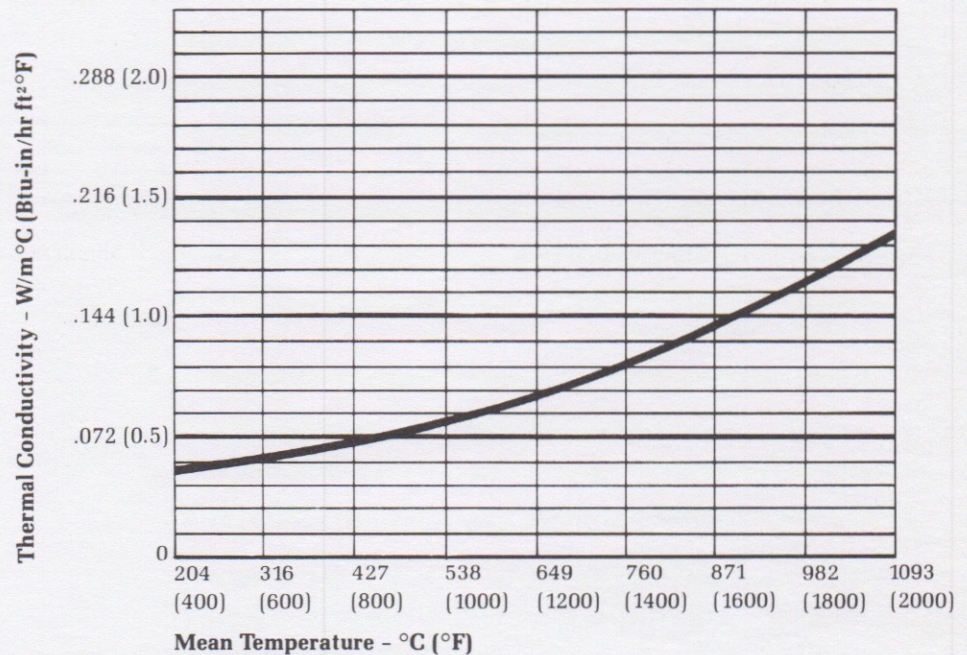
*Rated thickness measured at 0.56 kg/cm² (8 psi) compression, per Tappi Method T-411m44.

Specifications

Fiberfrax 970-H Series Papers conform to U.S. Coast Guard requirements for "Incombustible Materials", subpart 164.009. For additional conformations, see list of specification approvals.

970 Paper

Thermal Conductivity vs Mean Temperature (per ASTM C-177)**

Fiberfrax 970 Paper - 160 kg/m³ (10 lb/ft³) density**

Hot Face °C (°F)	Insulation Thickness - mm (in)						
	Cold Face Temperature - °C (°F)						
	.08 (1/32)	1.6 (1/16)	3.2 (1/8)	6.4 (1/4)	13 (1/2)	19 (3/4)	25 (1)
538 (1000)	400 (749)	335 (635)	268 (513)	202 (396)	145 (295)	119 (246)	102 (217)
649 (1200)	471 (881)	395 (744)	316 (600)	239 (462)	172 (342)	140 (284)	120 (249)
760 (1400)	—	456 (853)	364 (687)	276 (529)	200 (392)	163 (325)	139 (283)
871 (1600)	—	516 (961)	413 (775)	315 (599)	229 (444)	186 (368)	160 (320)
982 (1800)	—	—	462 (863)	353 (669)	258 (498)	212 (413)	181 (359)
1093 (2000)	—	—	510 (951)	393 (740)	290 (554)	237 (459)	204 (400)
1204 (2200)	—	—	—	433 (812)	321 (610)	265 (508)	228 (443)
1260 (2300)	—	—	—	453 (848)	337 (639)	279 (533)	240 (465)

**All heat flow calculations are based on a surface emissivity factor of .90, an ambient temperature of 27°C (80°F), and zero wind velocity, unless otherwise stated. All thermal conductivity values for Fiberfrax materials have been measured in accordance with ASTM Test Procedure C-177. When comparing similar data, it is advisable to check the validity of all thermal conductivity values and ensure the resulting heat flow calculations are based on the same condition factors. Variations in any of these factors will result in significant differences in the calculated data.



Thermal Products Company, Inc.
4520 S. Berkeley Lake Rd.
Norcross, GA 30071-1639

Phone: 770-662-0456

Fax: 770-242-6210

www.thermalproductsco.com

info@thermalproductsco.com